

ABBE REFRACTOMETERS



Abbe Refractometers

- ▶ Page 2  **DR-A1** <DIGITAL>
- ▶ Page 3  **NAR-1T LIQUID**
 **NAR-1T SOLID**
- ▶ Page 4  **NAR-2T** <HIGH TEMPERATURE MODEL>
- ▶ Page 5  **NAR-3T** <PRECISION MODEL>
- ▶ Page 4  **NAR-4T** <HIGH REFRACTIVE INDEX MODEL>

Multi-Wavelength Abbe Refractometers

- ▶ Page 6  **DR-M2**
 **DR-M4**
- ▶ Page 7  **DR-M2/1550(A)**
 **DR-M2/1550(B)**
 **DR-M4/1550(A)**
 **DR-M4/1550(B)**



■ ATAGO products conform to ASTM Standards.

※Please contact ATAGO for further details.

D542	STM for Index of Refraction of Transparent Organic Plastics
D1045	STM for Sampling and Testing Plasticizers Used in Plastics
D1218	STM for Refractive Index and Refractive Dispersion of Hydrocarbon Liquids
D1416	STM for Rubber from Synthetic Sources--Chemical Analysis
D1747	STM for Refractive Index of Viscous Materials
D1807	STM for Refractive Index and Specific Optical Dispersion of Electrical Insulating Liquids
D4095	STM for Use of the Refractometer for Determining Nonvolatile Matter (Total Solids) in Floor Polishes
D5006	STM for Measurement of Fuel System Icing Inhibitors (Ether Type) in Aviation Fuels
D5775	STM for Rubber from Synthetic Sources-Bound Styrene in SBR

■ Sucrose Solution (for Brix confirmation)

Sucrose solutions for Brix confirmation are NOW available by ATAGO. Please choose for your use.



Part No.	Part Name	Brix Concentration	Contents
RE-110010	10% Sucrose	10.00 ± 0.03%	Approx. 5mL
RE-110020	20% Sucrose	20.00 ± 0.03%	
RE-110030	30% Sucrose	30.00 ± 0.03%	
RE-110040	40% Sucrose	40.00 ± 0.04%	
RE-110050	50% Sucrose	50.00 ± 0.05%	
RE-110060	60% Sucrose	60.00 ± 0.05%	

* Shelf life for these solutions is 6 weeks.

EXPLANATION OF ICONS

Icons for functions, specifications and scales have been added to catalog.



- *Can be connected to a circulating constant temperature bath
- *Thermostatable par circulation
- *Cirkulierendes konstant temperiertes Wasserbad angeschlossen
- *Collegabile a bagno termostatico a circolazione
- *Conexión para baño termostático de circulación
- *可連結恒温循環水槽



- *RS-232C Interface
- *Interface RS232C pour PC
- *Interface RS232C
- *Interfaccia RS232C
- *Interface RS232C
- *RS-232C輸出



- *Calibration with water
- *Calibration 1 point* sur eau distillée
- *Kalibrierung mit Wasser
- *Calibrazione con acqua
- *Calibración con agua
- *用水歸零



- *High temperature samples
- *Résistant à la chaleur
- *Hitzebeständig
- *Resistente al calore
- *Muestras De Alta Temperatura
- *高溫樣品用



- *AC outlet (AC100 to 240V)
- *Alimentation secteur(CA 100 à 240 V)
- *AC Ausgang (AC 100 bis 240V)
- *Uscita AC (AC 100 240V)
- *Conexión a 240V CA
- *AC插座 (AC 100至240V)



- *Refractive index scale
- *Indice de réfraction
- *Skala fuer Refraktive Index
- *Indice di rifrazione
- *Escala de índice de refracción
- *折射率刻度



- *Can be connected to a printer
- *Sortie imprimante
- *Verbindung mit Personalcomputer
- *Collegabile a stampante esterna
- *Conexión para impresora
- *可與印表機連結



- *Digital display
- *Affichage numérique
- *Digital Anzeige
- *Display digitale
- *Pantalla digital
- *數字顯示

- Function
- Specification
- Scale

DIGITAL ABBE REFRACTOMETER


Cat.No.1310

DR-A1



By simply setting the boundary line of refraction at the cross hairs, this refractometer directly indicates a measurement value (in refractive index or Brix (%), selective) together with the temperature on a digital display. This refractometer enables anyone to easily carry out measurements without reading analog graduation.

※Dispersion value cannot be measured with the DR-A1.



Refraction view



Display



SPECIFICATIONS

Measurement range	: Refractive Index (nD) 1.3000 to 1.7100 Brix 0.0 to 95.0% (Automatic Temperature Compensation is executed from 5 to 50°C)
Minimum scale	: Refractive Index (nD) 0.0001, Brix 0.1%
Measurement accuracy	: Refractive Index (nD) ± 0.0002 , Brix $\pm 0.1\%$
Measurement temperature	: 5 to 50°C
Ambient temperature	: 5 to 40°C
Light source	: LED Lamp (Approximating to wavelength of D-line)
Power supply	: AC adapter (100 to 240V (50/60Hz) AC input)
Power consumption	: 16VA
Dimensions and weight	: Refractometer 13 × 29 × 31cm, 6.0kg (main unit only) AC adapter 10.5 × 17.5 × 4 cm, 0.7kg

ACCESSORIES

Test piece		1 pc
Contact liquid [monobromonaphthalene](4mL)		1 pc
Allen wrench for detaching/attaching prism		1 pc
Lighting adapter for solid sample		1 pc
Tube band		10 pcs
AC adapter (AD-13)		1 pc
AC cable		1 pc
Instruction manual		1 pc

CIRCULATING CONSTANT TEMPERATURE BATH

-optional-

60-C3
Cat.No.1921



SPECIFICATIONS

Tank capacity	: 0.5L
Temperature setting range	: 10 to 60°C (water)
Temperature control	: PID control method using a thermo-module
Flow Rate	: 4L / min
Temperature display	: LED (red)
Under setting display	: LED (green)
Nozzle	: External diameter of 9mm, 2pieces
Temperature sensor	: Platinum thermometer bulb
Under safety device	: Low-water cut off device, and mechanism to prevent overheating
Power Supply	: AC100 to 240V, 50/60Hz
Power Consumption	: 430VA
Dimensions & Weight	: 38 × 24 × 27cm, 11.0kg (main unit only)



ABBE REFRACTOMETER

Cat.No.1211



NAR-1T_{LIQUID}

The NAR-1T LIQUID is for liquid sample measurement only. This model has the Refractive Index scale and Brix scale, and operates with D line (589nm) light source. Calibration is performed using distilled water.

SPECIFICATIONS

Measurement range : Refractive Index (nD) 1.3000 to 1.7000
Brix 0.0 to 95.0%

Minimum scale : Refractive Index (nD) 0.001, Brix 0.5%

Measurement accuracy : Refractive Index (nD) ± 0.0002 , Brix $\pm 0.1\%$

Measurement temperature: 5 to 50°C

Ambient temperature : 5 to 40°C

Light source : LED Lamp (Approximating to wavelength of D-line)

Power supply : AC100V to 240V , 50/60Hz

Power consumption : 5VA

Dimensions and weight: Refractometer 13 × 18 × 23cm, 2.5kg (main unit only)
Thermometer 10 × 11 × 7 cm, 0.5kg

ACCESSORIES

Digital thermometer1pc

AC power cable1pc

Lamp cable1pc

LED lamp3pcs


Special screwdriver for calibration1pc

Tube band10pcs

Instruction manual1pc



NAR-1T LIQUID

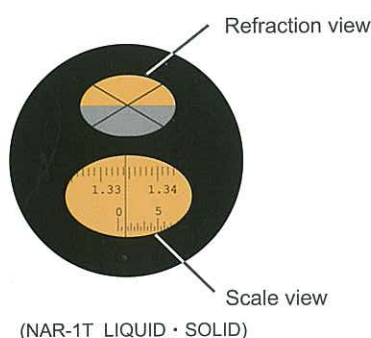

(NAR-1T LIQUID · SOLID)

ABBE REFRACTOMETER

Cat.No.1212



NAR-1T_{SOLID}

The NEW NAR-1T SOLID Abbe Refractometer was designed for solid sample measurement (this model can also measure liquid samples).

This model has the Refractive Index scale and Brix scale, and operates with D line (589nm) light source.

SPECIFICATIONS

Measurement range : Refractive Index (nD) 1.3000 to 1.7000
Brix 0.0 to 95.0%

Minimum scale : Refractive Index (nD) 0.001, Brix 0.5%

Measurement accuracy : Refractive Index (nD) ± 0.0002 , Brix $\pm 0.1\%$

Average dispersion value : nF-nC (to be calculated according to conversion table)

Measurement temperature: 5 to 50°C

Ambient temperature : 5 to 40°C

Light source : LED Lamp (Approximating to wavelength of D-line)

Power supply : AC100V to 240V , 50/60Hz

Power consumption : 5VA

Dimensions and weight: Refractometer 13 × 18 × 23cm, 2.5kg (main unit only)
Thermometer 10 × 11 × 7 cm, 0.5kg

ACCESSORIES

Digital thermometer1pc

AC power cable1pc

Lamp cable1pc

LED lamp3pcs

Test piece1pc

Contact liquid [monobromonaphthalene] (4mL)1pc

Special screwdriver calibration1pc

Milky white reflector1pc

Tube band10pcs

Instruction manual1pc



NAR-1T SOLID

Abbe Refractometer for low refractive index measurement

In addition to our standard Abbe Refractometer NAR-1T SOLID, we can supply the following Abbe model.

●Abbe Refractometer NAR-1T · LO Cat.No.1217 (for low refractive index measurement)

Measurement range : Refractive Index (nD) 1.1500 to 1.4800 / Measurement temperature : 5 to 50 °C

Note: The refractometers listed above have the same scale as the NAR-1T SOLID.

To obtain the true refractive index value, simply refer to the conversion table that is provided with each unit.

※Dispersion values cannot be measured by the Abbe refractometers listed above. For further details, please inquire to the Overseas Department at ATAGO.



ABBE REFRACTOMETER

Cat.No.1220

NAR-2T



HIGH TEMPERATURE MODEL

Designed for use with compounds that require measurement at high temperatures (up to 120°C).

SPECIFICATIONS

Measurement range :	Refractive Index (nD) 1.3000 to 1.7000 Brix 0.0 to 95.0%
Minimum scale :	Refractive Index (nD) 0.001, Brix 0.5%
Measurement accuracy :	Refractive Index (nD) ± 0.0002 , Brix $\pm 0.1\%$
Average dispersion value :	nF-nC (to be calculated according to conversion table)
Measurement temperature :	5 to 120°C
Ambient temperature :	5 to 40°C
Light source :	LED Lamp (Approximating to wavelength of D-line)
Power supply :	AC100V to 240V, 50/60 Hz
Power consumption :	5VA
Dimensions and weight :	Refractometer 12 × 20 × 25cm, 5.8kg (main unit only) Thermometer 10 × 11 × 7cm, 0.5kg

ACCESSORIES

Digital thermometer	1 pc
AC power cable	1 pc
Lamp cable	1 pc
LED lamp	3 pcs
Test piece	1 pc
Contact liquid [monobromonaphthalene](4mℓ)	1 pc
Special screwdriver for calibration	1 pc
Tube band	10 pcs
Instruction manual	1 pc



NAR-2T

ABBE REFRACTOMETER

Cat.No.1240

NAR-4T



HIGH REFRACTIVE INDEX MODEL

Research and Development on new materials for modern technologies is being actively conducted in every industry. Many of these materials (especially polymer film and related materials) are of high refractive index - often too high for the existing Abbe refractometers. These can now be measured with the nD 1.4700 to 1.8700 range of the NAR-4T.

SPECIFICATIONS

Measurement range :	Refractive Index (nD) 1.4700 to 1.8700
Minimum scale :	Refractive Index (nD) 0.001
Measurement accuracy :	Refractive Index (nD) ± 0.0002
Measurement temperature :	5 to 50°C
Ambient temperature :	5 to 40°C
Light source :	LED Lamp (Approximating to wavelength of D-line)
Power supply :	AC100V to 240V, 50/60Hz
Power consumption :	5VA
Dimensions and weight :	Refractometer 13 × 18 × 23cm, 2.5kg (main unit only) Thermometer 10 × 11 × 7 cm, 0.5kg

ACCESSORIES

Digital thermometer	1 pc
AC power cable	1 pc
Lamp cable	1 pc
LED lamp	3 pcs
Test piece	1 pc
Contact liquid [monobromonaphthalene](4mℓ)	1 pc
Contact liquid [methylene iodidecontaining sulfur solution](4mℓ)	1 pc
Special screwdriver for calibration	1 pc
Milky white reflector	1 pc
Tube band	10 pcs
Instruction manual	1 pc



NAR-4T

● Abbe Refractometer NAR-2T · LO Cat.No.1227 (for high temperature and low refractive index measurements)

Measurement range : Refractive Index (nD) 1.1500 to 1.4800 / Measurement temperature : 5 to 120 °C

● Abbe Refractometer NAR-2T · HI Cat.No.1228 (for high temperature and high refractive index measurements)

Measurement range : Refractive Index (nD) 1.4700 to 1.8700 / Measurement temperature : 5 to 120 °C

Another option

*ATAGO can supply Abbe refractometer with measurement range of "nD1.7000 to 2.0800" and with measurement temperature range of "5 to 50°C" or "5 to 120°C".

Note: The refractometers listed above have the same scale as the NAR-2T. To obtain the true refractive index value, simply refer to the conversion table that is provided with each unit.

※Dispersion values cannot be measured by the Abbe refractometers listed above. For further details, please inquire to the Overseas Department at ATAGO.



ABBE REFRACTOMETER

Cat.No.1230 **NAR-3T**



PRECISION MODEL

The NAR-3T was developed to give improved measurement accuracy and ease of use. This was achieved by making fundamental improvements to the optical system, utilizing a larger scale, incorporating a high intensity lamp and using a double control knob to give quick and more accurate control.

FEATURES

1. High accuracy obtained using a large scale.
 - (a) The scale is four times larger than those used in conventionality.
 - (b) The minimum scale division of 0.0002 enables measurements of refractive index of 0.0001 to be made.
2. Double control knob for easier operation.
 - (a) Fine control knob for fine adjustment gives greater accuracy and enables the operator to bring the boundary line into the center cross more quickly.
 - (b) This facility gives quicker operation and better reproducibility of measurements.
3. Able to measure solid and liquid samples.
 - (a) The high intensity lighting is suitable for the measurement of both solid and liquid samples.
4. Safe electrical system.
 - (a) The high intensity lighting is suitable for the measurement of both solid and liquid samples.
 - (b) The power supply cable is fixed to the main body of the instrument.
5. Built-in air dryer and moisture removal device.
 - (a) A large cartridge drying chamber containing silicagel is incorporated to prevent moisture condensing on the inside of the instrument.
 - (b) Means are provided for using compressed air to remove internal moisture droplets.




NAR-3T

SPECIFICATIONS

Measurement range	Refractive Index (nD) 1.30000 to 1.71000 Brix 0.00 to 95.00%
Minimum scale	Refractive Index (nD) 0.0002, Brix 0.1%
Measurement accuracy	Refractive Index (nD) ± 0.0001 , Brix $\pm 0.05\%$
Average dispersion value	$n_F - n_C$ (to be calculated according to conversion table)
Measurement temperature	5 to 50°C
Ambient temperature	5 to 40°C
Light source	LED Lamp (Approximating to wavelength of D-line)
Power supply	AC100V to 240V, 50/60Hz
Power consumption	5VA
Dimensions and weight	Refractometer 12 × 31 × 34cm, 9.0kg (main unit only) Thermometer 10 × 11 × 7 cm, 0.5kg

ACCESSORIES

Digital thermometer	1 pc
AC Power cable	1 pc
Lamp cable	1 pc
LED Lamp	3 pc
Allen wrench for calibration	1 pc
Test piece	1 pc
Contact liquid [monobromonaphthalene](4mL)	1 pc
Air purger for dehumidification	1 pc
Tube band	10 pcs
Instruction manual	1 pc

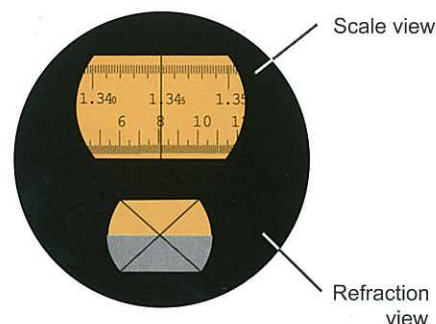

Measurement of double refraction samples

Note: Measurement of double refraction samples requires the "Polarizing eyepiece" that is supplied optionally. Polymer film and other compounds of this sort have different refractive indices depending on the orientation of the film (X-Y-Z axis). MULTI-WAVE-LENGTH ABBE REFRACTOMETERS are best suited for measuring film orientation, etc.

※Please ask if you need more information for measurement of double refraction samples.



MULTI-WAVELENGTH ABBE REFRACTOMETERS

Cat.No.1410

DR-M2



Cat.No.1414

DR-M4



Refractive Index or Abbe number (ν_d or ν_e) can be measured at different wavelengths ranging from 450 to 1,100nm. For measurement at wavelengths ranging from 681 to 1,100nm, the optional near infrared ray viewer (Part No.RE-9119) is required. The DR-M2/DR-M4 digitally displays the measurement results of refractive index or Abbe number on the LCD. Measurement can be achieved by matching the boundary line at the intersection point of the cross hairs. These refractometers can be connected to the digital printer.

SPECIFICATIONS

Measurement range :

DR-M2

Wavelength 450nm : Refractive Index 1.3278 to 1.7379
Wavelength 589nm : Refractive Index 1.3000 to 1.7100
Wavelength 680nm : Refractive Index 1.2912 to 1.7011
Wavelength 1,100nm : Refractive Index 1.2743 to 1.6840

DR-M4

Wavelength 450nm : Refractive Index 1.5219 to 1.9220
Wavelength 589nm : Refractive Index 1.4700 to 1.8700
Wavelength 680nm : Refractive Index 1.4545 to 1.8544
Wavelength 1,100nm : Refractive Index 1.4260 to 1.8259

Minimum indication : Refractive Index (nD) 0.0001, Abbe number 0.1

Measurement accuracy: Refractive Index (nD) ± 0.0002
(with the attached test piece at 589nm)

Wavelength range : From 450 to 1,100nm (with interference filters)
(For measurement at wavelengths ranging from 681 to 1,100nm, the near infrared ray viewer (optional) is required.)

Measurement temperature range : 5 to 50°C

Output terminal : For digital printer, DP-22(B)(optional),
Conforming to Centronics standard

Power supply : AC100V to 240V, 50/60Hz

Power consumption : 160VA

Dimensions and weight: Refractometer 13 × 29 × 31cm, 6.0kg
Light source unit 15 × 33 × 11cm, 3.0kg



Display



ACCESSORIES

Test piece	1 pc
Allen wrench	1 pc
Contact liquid [monobromonaphthalene](4mL)	1 pc
Contact liquid [methylene iodidecontaining sulfur solution](4mL)(for DR-M4 only)	1 pc
Interference filter, 589nm and 546nm	1 each
Lighting glass for film measurement	1 pc
Spare bulb	1 pc
Tube band	10 pcs
Instruction manual	1 pc

Abbe number can be measured simply!

(In the case of measurement of Abbe number " ν_d ")

(1)Set the sample on the prism surface.

(2)Insert the 589nm interference filter (attached to the DR-M2 as a standard accessory). While looking through the eyepiece, match the boundary line with the intersection point of the cross hairs. Then, press the SET key.

(3)Replace the interference filter with the 486nm interference filter (of an optional part). While looking through the eyepiece, match the boundary line with the intersection point of the boundary line with the intersection point of the cross hairs. Then, press the SET key.


(4)Replace the interference filter with the 656nm interference filter (of an optional part). While looking through the eyepiece, match the boundary line with the intersection point of the cross hairs.

(5)Press the SET key.
The indication on the display at that time represents the Abbe number " ν_d ".

*It is very convenient if you use an optional digital printer, because refractive index at each wavelength and Abbe number are printed.



Display



Refraction View



MULTI-WAVELENGTH ABBE REFRACTOMETERS

Cat.No.1412

DR-M2/1550(A) ((A)only)



Cat.No.1413

DR-M2/1550(B)



Cat.No.1415

DR-M4/1550(A) ((A)only)



Cat.No.1416

DR-M4/1550(B)



Refractive Index or Abbe number (ν_d or ν_e) can be measured at different wavelengths ranging from 450 to 1,550nm. These refractometers digitally display the measurement result on the LCD. Measurement can be achieved by matching the boundary line at the intersection point of the cross hairs. These units can be connected to the digital printer.

SPECIFICATIONS

Measurement range :

DR-M2/1550 (A) • DR-M2/1550 (B)

Wavelength 450nm: Refractive Index 1.3278 to 1.7379

Wavelength 589nm: Refractive Index 1.3000 to 1.7100

Wavelength 680nm: Refractive Index 1.2912 to 1.7011

Wavelength 1,100nm: Refractive Index 1.2743 to 1.6840

Wavelength 1,550nm: Refractive Index 1.2662 to 1.6759

DR-M4/1550 (A) • DR-M4/1550 (B)

Wavelength 450nm: Refractive Index 1.5219 to 1.9220

Wavelength 589nm: Refractive Index 1.4700 to 1.8700

Wavelength 680nm: Refractive Index 1.4545 to 1.8544

Wavelength 1,100nm: Refractive Index 1.4260 to 1.8259

Wavelength 1,550nm: Refractive Index 1.4138 to 1.8136

Minimum indication : Refractive Index (nD) 0.0001,
Abbe number 0.1

Measurement accuracy : Refractive Index (nD) ± 0.0002
(with the attached test piece at 589nm)

Wavelength range : From 450 to 1,550nm (with interference filters)

Measurement temperature range : 5 to 50°C

Output terminal : For digital printer, DP-22(B)(optional),
Conforming to Centronics standard

Light source : Monochromatic light source device
Dimensions, Weight and Power supply
(Cat.No.1412,1415)

23 × 35 × 21 to 31cm, 5.9kg,

AC200 to 240V, 50/60Hz, 285VA

(Cat.No.1413,1416)

23 × 32 × 21 to 31cm, 5.0kg,

AC100 to 110V, 50/60Hz, 225VA

Power supply : AC100V to 240V, 50/60Hz

Power consumption : 100VA


Dimensions and weight : Refractometer 13 × 29 × 31cm, 6.0kg
Power supply unit 15 × 33 × 11cm, 3.2kg

ACCESSORIES

Near infrared ray viewer	1pc
Mounting adapter	1pc
Monochromatic light source device	1set
Test piece	1pc
Allen wrench	1pc
Contact liquid [monobromonaphthalene](4mℓ)	1pc
Contact liquid [methylene iodidecontaining sulfur solution] (4mℓ) (for DR-M4/1550 only)	1pc
Interference filter, 589nm	1pc
Interference filter frame for 589nm	1pc
Interference filter frame for registration	1pc
Tube band	10pcs
Lighting glass for film measurement	1pc
Instruction manual	1pc



Display



Refraction View



DR-M2/1550 (A)

DIGITAL PRINTER

-optional-

DP-22(B)

Cat.No.3125



All ATAGO refractometers are designed and manufactured in Japan.

ATAGO CO.,LTD.

Headquarters: 32-10, Honcho, Itabashi-ku, Tokyo 173-0001 Japan

TEL : 81-3-3964-6156 FAX : 81-3-3964-6137

overseas@atago.net http://www.atago.net/

ATAGO U.S.A.,Inc.

TEL : 1-425-637-2107 customerservice@atago-usa.com

ATAGO INDIA Instruments Pvt. Ltd.

TEL: 91-22-2833-8038 / 8076 customerservice@atago-india.com

ATAGO (THAILAND) Co., Ltd.

TEL : 662-982-8718-9 customerservice@atago-thailand.com

ATAGO BRASIL Ltda.

TEL : 55 16 3916-6000 customerservice@atago-brasil.com

ATAGO ITALIA s.r.l.

TEL : 39 2 36557267 customerservice@atago-italia.com



HACCP GMP GLP

ATAGO products comply with HACCP, GMP, and GLP standards.

※Specifications and appearance are subject to change without notice.